



FIRE DEPARTMENT VENTILATION AND RESCUE SAWS

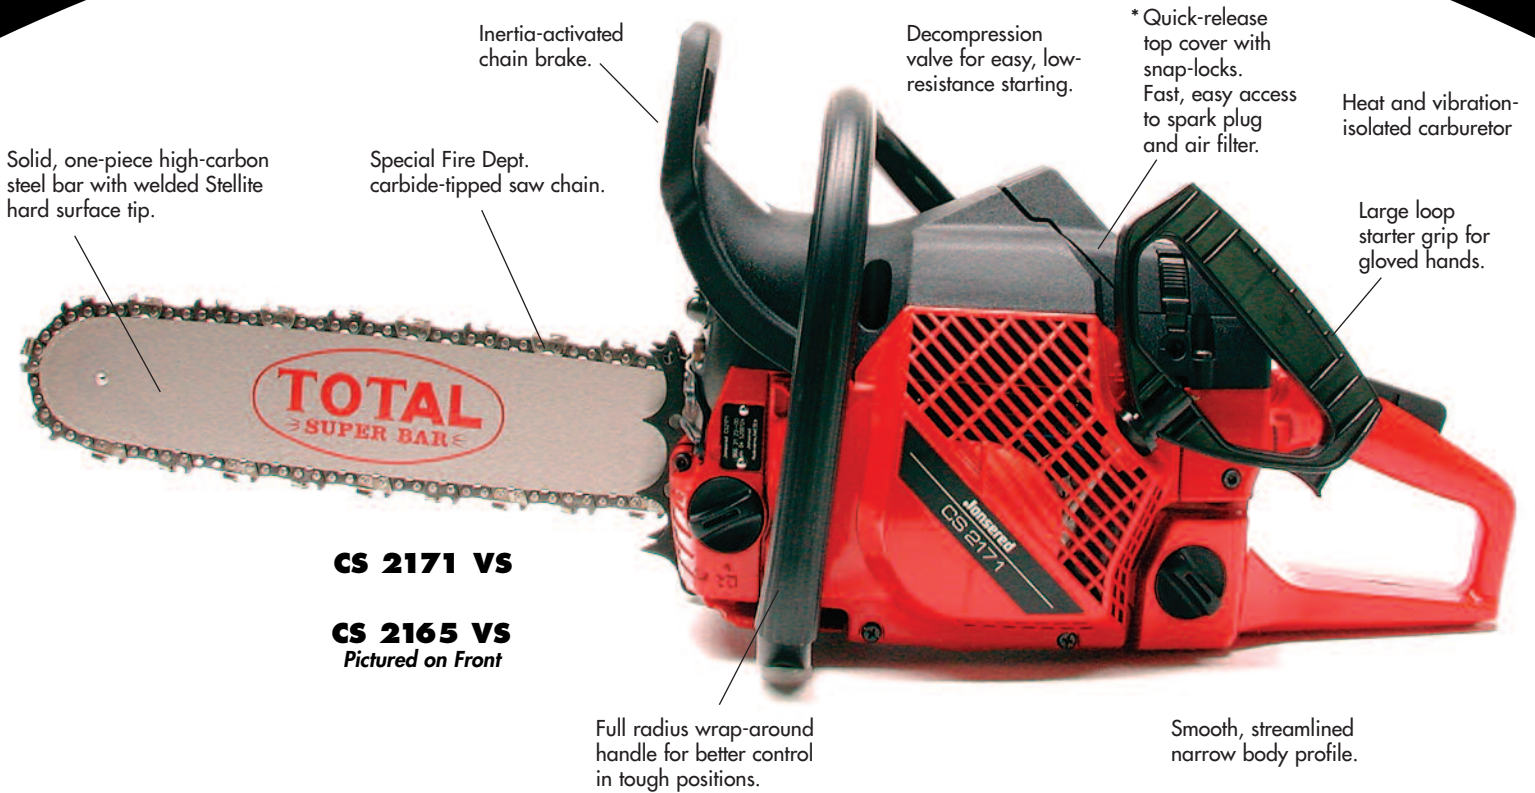

CS 2171 VS

CS 2165 VS
Pictured on Front

FEATURES



TURBO AIR FILTRATION

No need for bulky external stack filters, Jonsered's Turbo system uses centrifugal force to separate and remove up

to 97% of solid particles from the intake air. This clean air is forced through the turbo nozzle into the filter chamber and as a result, the air filter stays clean up to 30 times longer than a conventional saw. The Turbo ensures relentless high-performance from the easy-breathing engine.



START CONTROL & STOP SWITCH

The combined start/choke system simplifies starting. Pulling out the choke control also sets the half-speed throttle for easy cold starting.

The location of the stop switch allows fast shut off with a gloved hand. Note the wide handle base, which also serves as a hand guard in the case of chain derailment or breakage. The throttle lock-out helps prevent unintentional throttle operation.



CARBIDE CHAIN

Terminator® carbide saw chain,

designed for Fire Department ventilation and rescue use. Delivers superior performance where high impact and abrasive conditions are encountered. Outlasts up to 10 regular chains and stays sharp up to 25 times longer. Dual-depth gauges and a full-radius carbide cutter surface provide strength, durability and fast-cutting performance.



LOW VIBRATION

An array of steel coil springs effectively isolate engine and cutting vibrations,

minimizing transfer to the handles. Unlike rubber mounts, the strong and durable spring material does not deteriorate in hot conditions.

SPECS

	CS 2165 VS	CS 2171 VS
Engine Displacement	65.1cc / 4.0ci	70.7cc / 4.3ci
Power Output	4.6 hp / 3.4 kW	5.3 hp / 3.9 kW
Dry weight, complete w/ bar & chain	17.2 lb.	17.4 lb.
Max. no-load rpm	12,500	13,500
Decompression Valve	Yes	Yes
Side-access chain tensioner	Yes	Yes
Quick-release top cover	*No	Yes
Bar length	16"	16"
Chain pitch/gauge	3/8"/.058	3/8"/.058
Fuel tank capacity	26.0 fl. oz.	26.0 fl. oz.
Oil tank capacity	13.5 fl. oz.	13.5 fl. oz.
Noise level db(A)	102	102.5
Vibration, front/rear handles, m/s ²	3.6/5.7	4.6/5.2
Air filter	Internal, non-woven	
Chain oiler	Adjustable automatic, zero-flow @ idle	
Chain brake	Inertia/manual	
Clutch	Inboard, 3-shoe, centrifugal	

Jonsered

Imported in the Eastern US exclusively by Tilton Equipment Company.

1-877-693-7729 www.tiltonequipment.com

Please Note: Every effort was made to ensure accuracy at time of printing. Product features, specifications, appearances and standard equipment are subject to change without notice.

Printed in USA

No. 90-1004501